


REV.	DATE	FILE No.
1.0	2008-7-28	CC474-MM-2M

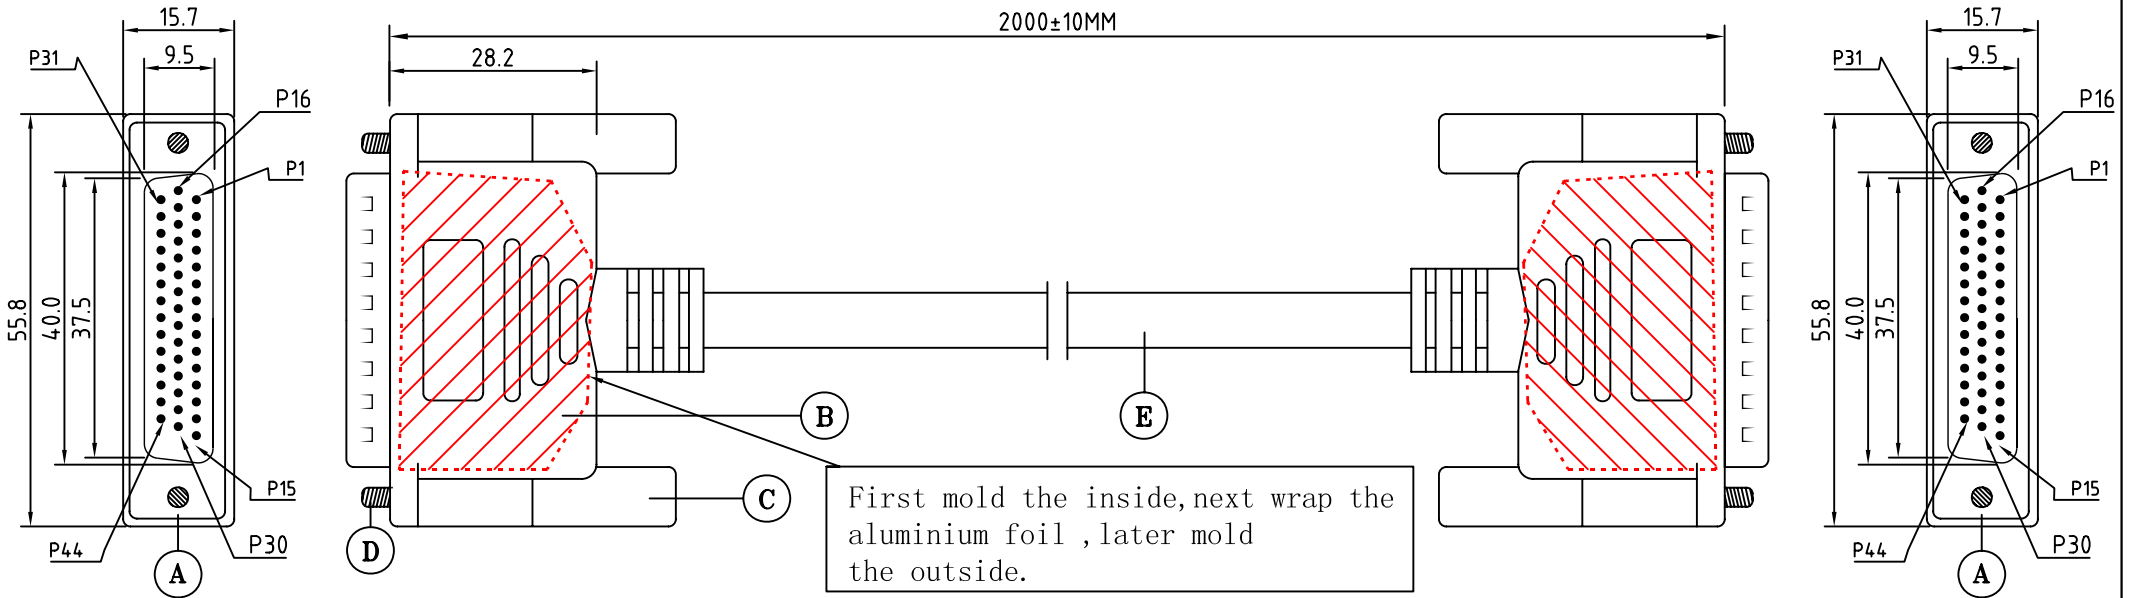

First mold the inside, next wrap the aluminium foil, later mold the outside.

先啤内模, 再包铝箔纸, 最后成型外模。

44PIN MALE


44PIN MALE

**SPECIFICATION:**

ITEM	PART NAME	MATERIAL	COLOR	QTY.
A	GHD44-MSN101-NK HDD44M	P.B.	NICKEL	2SET
B	MODEL TY-275 TYPE	P.V.C	GREY	2
C	MODEL TY-276 TYPE	P.V.C	GREY	4
D	TS040X400TNOPO SCREW PLATRD	MILD ST.	NICKEL	4
E	(0.12/7TX44C+0.16/7T+AL)X1C O.D.9.5MM	P.V.C	GREY	2M

NOTE: ALL MATERIALS ARE COMPLIANCE TO "RoHS"

**WIRING DIAGRAM**  
HD44P.MALE                      HD44P. FEMALE

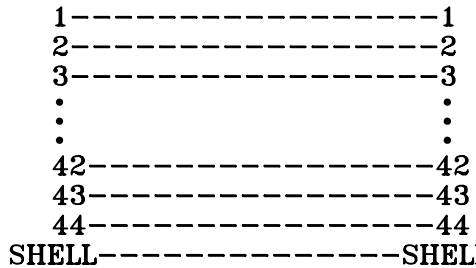

对应接线

CUSTOMER: DIGGELMANN			<b>Tai Yip Electrical Co., Ltd.</b>	
CUST P/N: CC474-MM-2M/GY-R				
S/O:	S/N:	PART No.: CC474-MM-2M/GY-R		
DRAWING No.	CC-474-02	PART NAME: RS 232 CABLE HD44M-HD44M(MOLDED)		
DRAWING BY	LingQi.M	UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MM TOLERANCE: DECIMAL .X ±0.1 .XX ±0.05		
CHECKED BY	GenDong.C			
APPROVER BY	ChenHan	ANGLE	±1/2°	SHEET 1 OF 1 SCALE NO