


P1,P2: M-Y123A  
M-126A  
P3: M-300B

Customer No: No.1

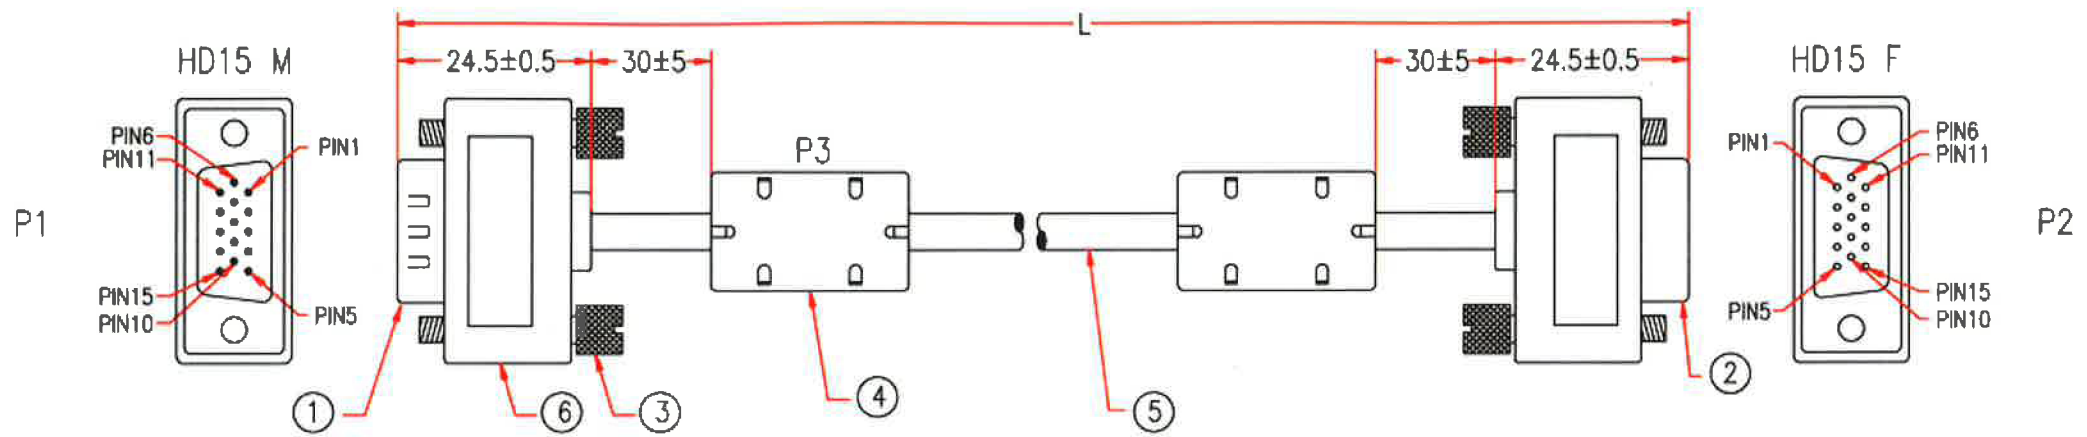

\* NOTE: All relevant materials are complied with RoHS directive .

P1		9F17-2		P2	
1	---	1	RED CONDUCTOR	1	RED CONDUCTOR
6	---	6	RED SHIELD	6	RED SHIELD
2	---	2	GREEN CONDUCTOR	2	GREEN CONDUCTOR
7	---	7	GREEN SHIELD	7	GREEN SHIELD
3	---	3	BLUE CONDUCTOR	3	BLUE CONDUCTOR
8	---	8	BLUE SHIELD	8	BLUE SHIELD
4	---	4		4	
5	---	5		5	
9	---	9		9	
10	---	10		10	
11	---	11		11	
12	---	12		12	
13	---	13		13	
14	---	14		14	
15	---	15		15	
SHIELD	---	SHIELD		SHIELD	

6	BLACK HEAT SHRINK TUBE $\phi 3.0 \times 5$ mm	6	M743
	BLACK HEAT SHRINK TUBE $\phi 1.0 \times 5$ mm	6	M743
	BLACK HEAT SHRINK TUBE $\phi 3.0 \times 10$ mm	2	M743
	COPPER FOIL 17*65mm	2	M309
	MOLDED PE COLOR TRANSPARENT		M280
	MOLDED PVC BLACK		M304
5	UL20276 [32AWG(1C+D+FAM)*3C+9C*30AWG]+AL+D+B, OD 4.6mm, JACKET BLACK	L-20mm	M298
4	FERRITE CORE 12*5.6*20mm	2	M113
	MOLDED PVC BLACK		M304
3	SCREW #4-40, LENGTH 6.25*25.5mm	4	M95
2	HD15 FEMALE WITH THREADED NUT(2pcs) INSIDE, 4.75*5.5mm, GOLD FLASH ON CONTACTS, METALLIZE TYPE, BLUE INSULATOR	1	M108
1	HD15 MALE WITH THREADED NUT(2pcs) INSIDE, 4.75*5.5mm, GOLD FLASH ON CONTACTS, METALLIZE TYPE, BLUE INSULATOR	1	M108
No.	DESCRIPTION	Q'TY	Supplier
APPROVED		<b>MF15/15MF-x</b> Cable Length Unless Other Spec. Tolerances: 0 ~200mm $\pm 10$ mm 201~1000mm $\pm 20$ mm 1001 ~1500mm $\pm 25$ mm 1501~2100mm $\pm 30$ mm 2100mm $\uparrow$ $\pm 40$ mm	
CHECKED	HU		
DRAWING	CHEN		
DATE	23/JUL/09		
	ITEM NO.		UNIT:mm

CHECKED

