


P1,P2:	M-Y123A
	M-126A
P3:	M-300B

Customer No: No.1

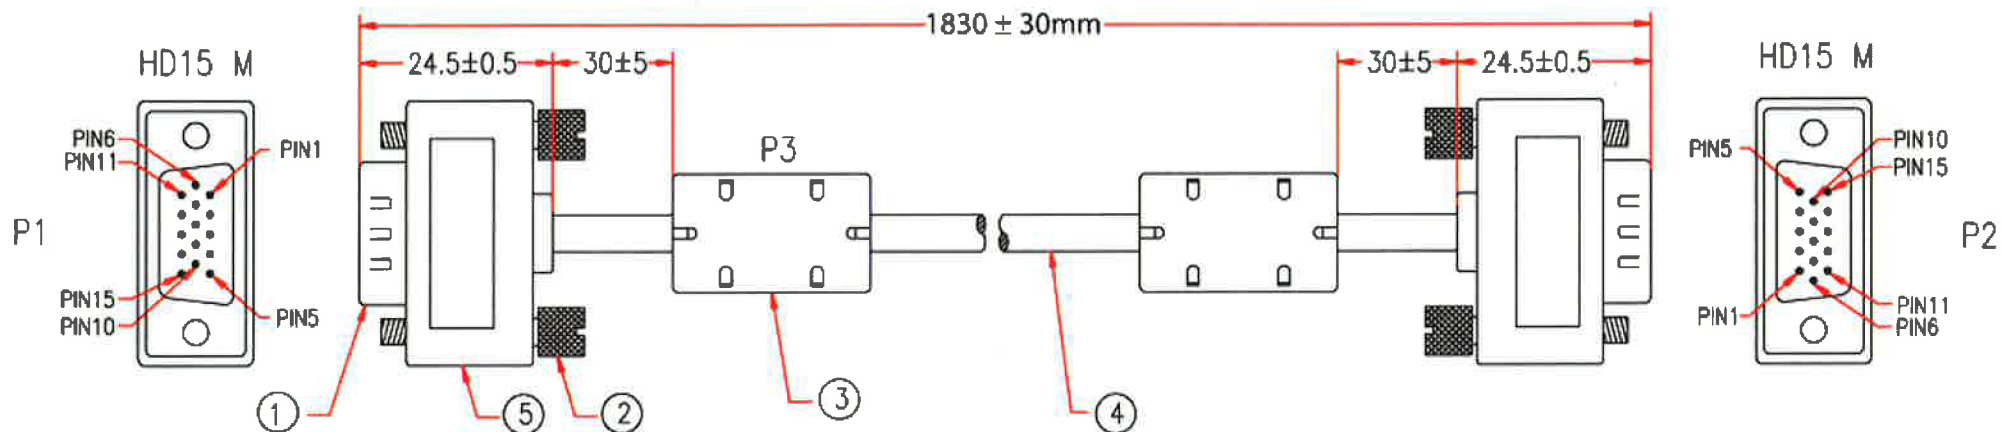

9B56-2	
P1	P2
1	1 RED CONDUCTOR
6	6 RED SHIELD
2	2 GREEN CONDUCTOR
7	7 GREEN SHIELD
3	3 BLUE CONDUCTOR
8	8 BLUE SHIELD
4	4
5	5
9	9
10	10
11	11
12	12
13	13
14	14
15	15
SHIELD	SHIELD

* NOTE: All relevant materials are complied with RoHS directive .

No.	DESCRIPTION	Q'TY	Supplier
5	BLACK HEAT SHRINK TUBE $\phi 3.0 \times 5\text{mm}$	6	M743
	BLACK HEAT SHRINK TUBE $\phi 1.0 \times 5\text{mm}$	6	M743
	BLACK HEAT SHRINK TUBE $\phi 3.0 \times 10\text{mm}$	2	M743
	COPPER FOIL 17*65mm	2	M309
	MOLDED PE COLOR TRANSPARENT		M280
	MOLDED PVC BLACK		M304
4	UL20276 [32AWG(1C+D+FAM)*3C+9C*30AWG]+AL+D+B, OD 4.6mm, JACKET BLACK	L-20mm	M298
3	FERRITE CORE 12*5.6*20mm	2	M113
	MOLDED PVC BLACK		M304
2	SCREW #4-40, LENGTH 6.25*25.5mm	4	M95
1	HD15 MALE WITH THREADED NUT(2pcs) INSIDE, 4.75*5.5mm, GOLD FLASH ON CONTACTS, METALLIZE TYPE, BLUE INSULATOR	2	M108

APPROVED		MF15/15M-x	Cable Length Unless Other Spec. Tolerances: 0 ~200mm $\pm 10\text{mm}$ 201~1000mm $\pm 20\text{mm}$ 1001~1500mm $\pm 25\text{mm}$ 1501~2100mm $\pm 30\text{mm}$ 2100mm \uparrow $\pm 40\text{mm}$
CHECKED	HU		
DRAWING	CHEN		
DATE	23/JUL/09		
	ITEM NO.		UNIT:mm

CHECKED

