





UNC #4-40 Hexscrew

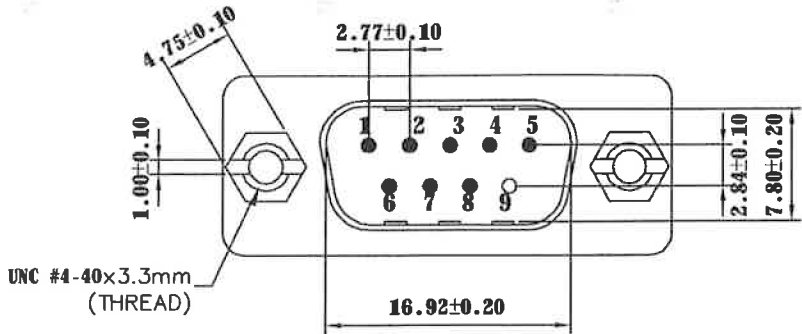

MA 005C (DB9M/M ADAPTER)

PIN OUT: 9Male

9Male	9Male
2	3
3	2
4	1
5	6
1	5
6	4
7	8
8	7
9	9

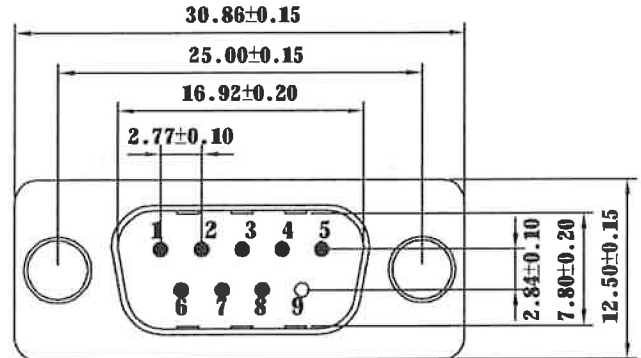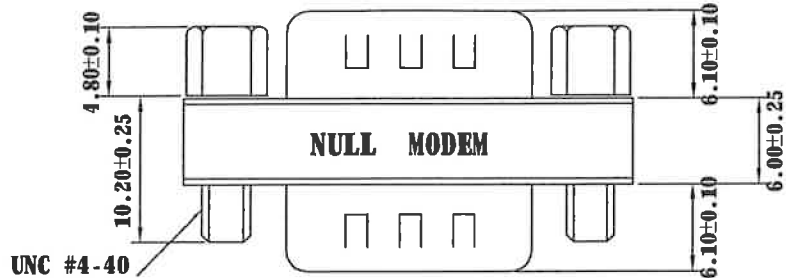

Label: Orange color with white character

One side: NULL MODEM

The other side: MINI ADAPTER

SPECIFICATION

INSULATOR: PBT Glass fibre reinforced UL 94 V0

CONTACT: Brass

CONTACT PLATING: Gold plated over nickel

SHELL: Tin Plated Shell

CURRENT RATING: 3 AMP

DIELECTRIC STRENGTH: 500V AC for one minute

INSULATOR RESISTANCE: 500M Ω min at 500V DC

TEMPERATURE: -25 °C — +105 °C

				Edition A1						
				SCALE 2:1	UNLESS OTHER WISE SPECIFIED TOLERANCE: 0.01: ±0.20 0.00: ±0.15 0.000: ±0.05	PART NO. MNM09MM	DWG NO.	DATE 2006-3-20		
				UNIT mm				DRAWN	CHECKED	APPRD
Customer	REVISION	DESCRIPTION	DATE	PAGE 1/1						

