
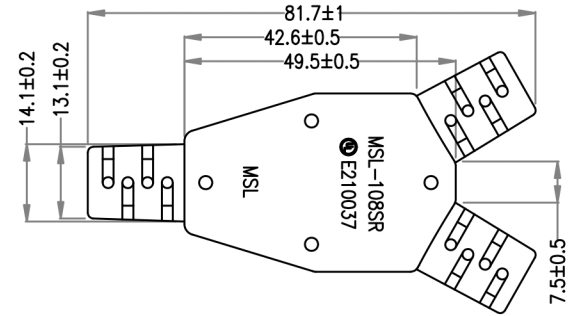

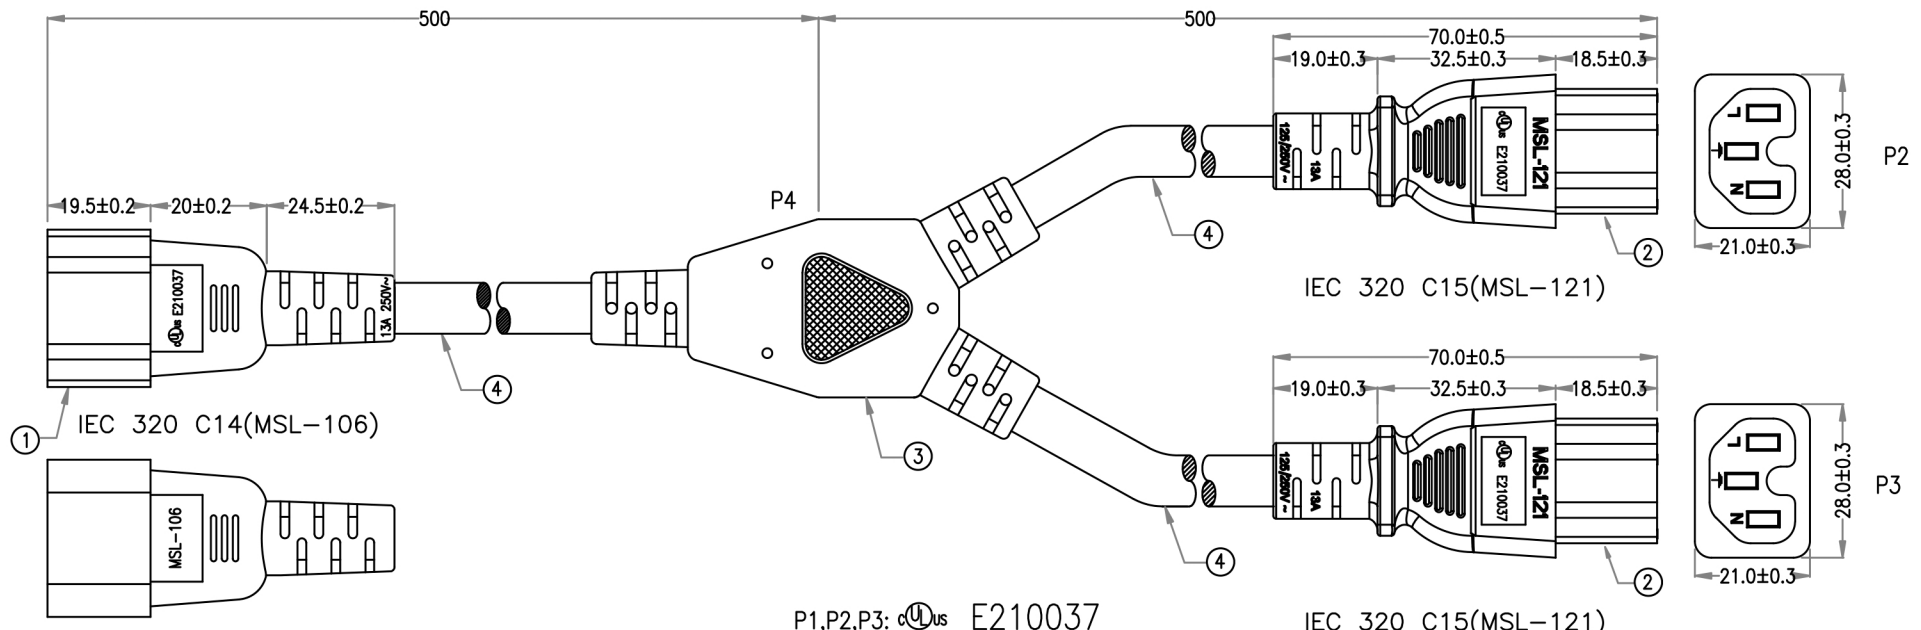


P1: M-053A  
 P2,P3: M-044  
 P4: M-008



P1,P2,P3: E210037

P4: E210037

\*NOTE: ALL relevant materials are complied with RoHS directive.  
 THE CABLE MARKING IS CONCAVE LETTERING MOULD

MARKING:

(UL) SJT 3/C 16AWG(1.31MM<sup>2</sup>) VW-1 105°C 300V E204978  
 CSA SJT 3/C 1.31MM<sup>2</sup>(16AWG) FT2 105°C 300V 204790 MSL

|                        |    |    |
|------------------------|----|----|
| 106124B2F16A(FP320-00) |    |    |
| P1                     | P2 | P3 |
| BLACK L                | L  | L  |
| WHITE N                | N  | N  |
| GREEN E                | E  | E  |

| No. | DESCRIPTION   | Q'TY       | Supplier |
|-----|---|------------|----------|
| 4   | UL SJT 16AWG*3C OD 8.5mm, JACKET BLACK, DRAWING No.EPSVT011603C-059 | 490mm*3PCS | M304     |
|     | MOLDED PVC 35P, COLOR BLACK   |            | M304     |
| 3   | BRACKET: YS-021   | 1          | M767     |
|     | TERMINAL: 99157BS-0   | 3          | M257     |
| 2   | BRACKET: 9745C  | 2          | M767     |
|     | TERMINAL: 98745L  | 6          | M257     |
| 1   | BRACKET: YS-014, COLOR BLACK  | 1          | M767     |
|     | TERMINAL: 2x4mm 98672BS-1   | 3          | M257     |

|          |                        |                    |   |
|----------|------------------------|--------------------|---|
| APPROVED |                        | <b>NCSVY2C15-1</b> | Unless Other Spec.<br>Tolerances:<br>0 ~200mm ±10mm<br>201~1000mm ±20mm<br>1001 ~1500mm ±25mm<br>1501~2100mm ±30mm<br>2100mm↑ ±40mm |
| CHECKED  | HU                     |                    |   |
| DRAWING  | XJW                    |                    |   |
| DATE     | 03/JUL/20              |                    |   |
| ITEM NO. | 106124B2F16A(FP320-00) |                    | UNIT:mm   |