
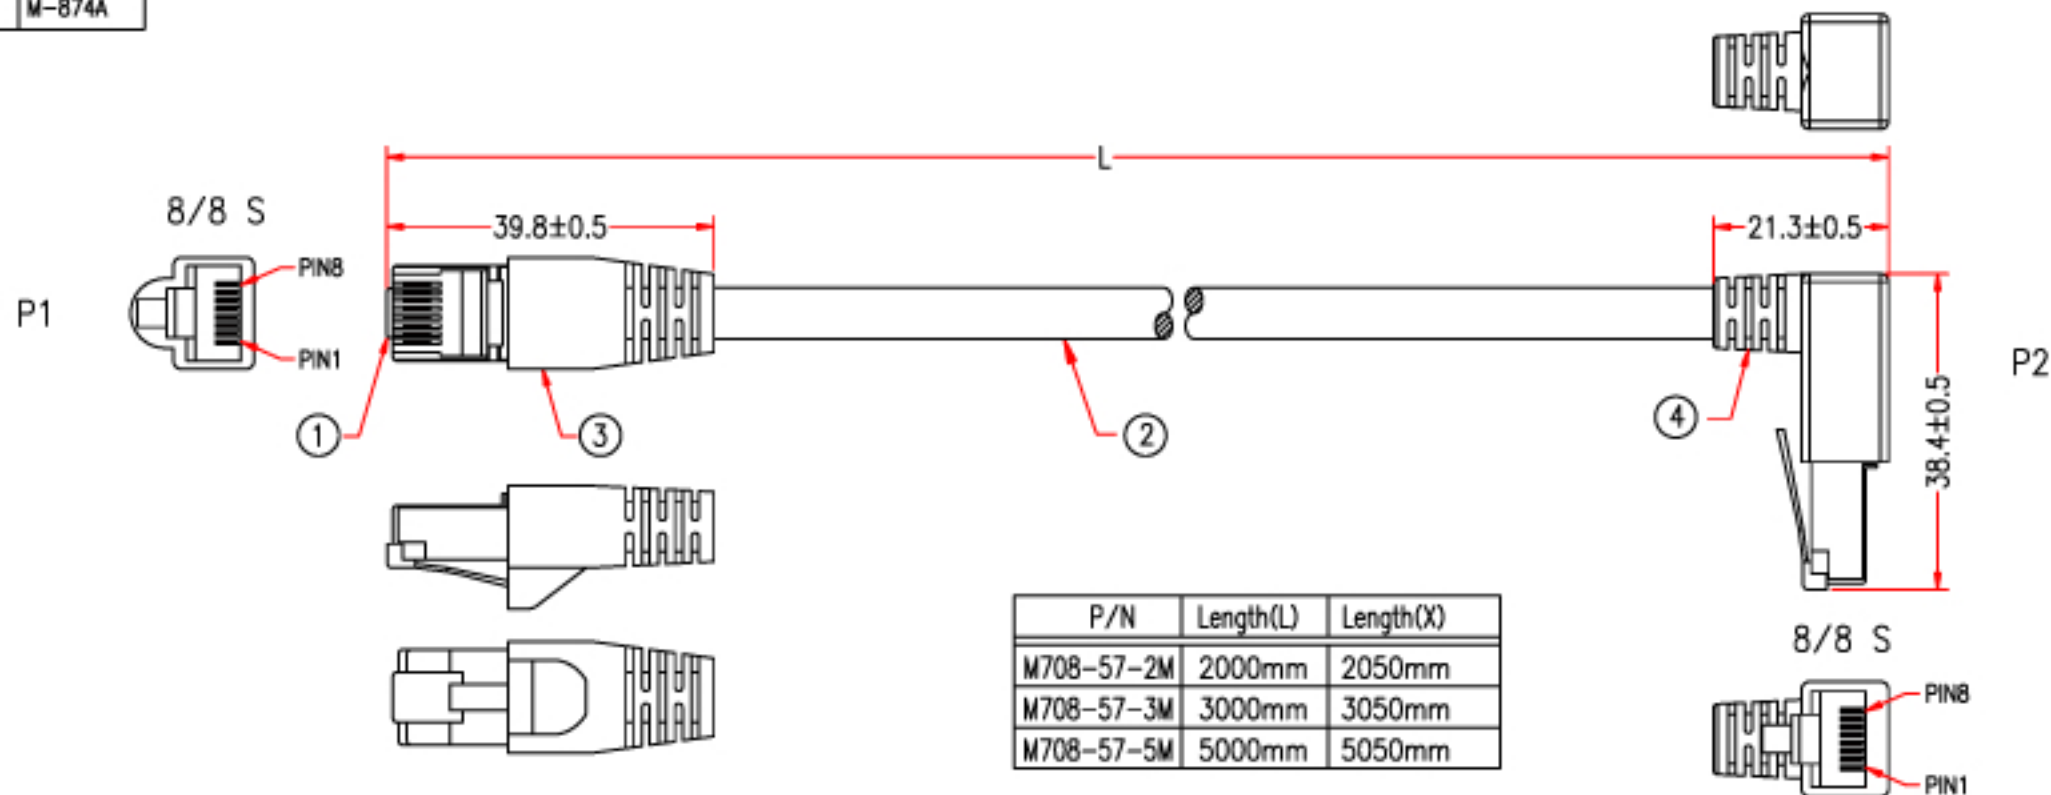


P1 : M-833A

P2 : M-Y874A
M-874A

8830

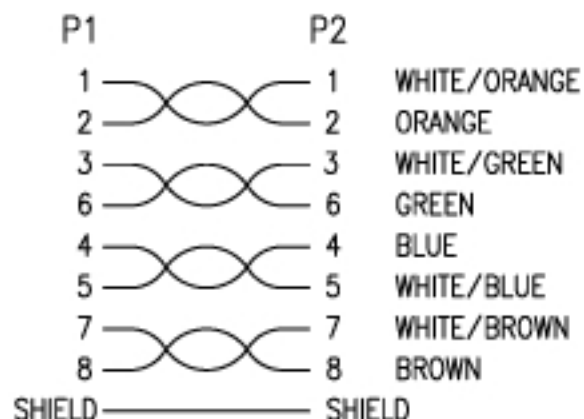

NOTE: ALL relevant materials are complied with RoHS directive

4	MOLDED PE COLOR TRANSPARENT		M280
	MOLDED PVC BLACK		M304
3	MOLDED PVC BLACK		M304
2	4 TWISTED PAIRS CAT.5e 24AWG SSTP, OD 6.2mm, JACKET BLACK, DRAWING NO. EUAB2404P-259	Xmm	M304
1	BPBC MODULAR SHIELDED PLUG, GOLD PLATING 50u" ON CONTACTS	2	M205
No.	DESCRIPTION	Q'TY	Supplier
APPROVED			Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm± ±40mm
CHECKED	HU		
DRAWING	JIANG		
DATE	19/JAN/10	ITEM NO.	
	CHECKED	UNIT:mm	