


8846

P1

P2

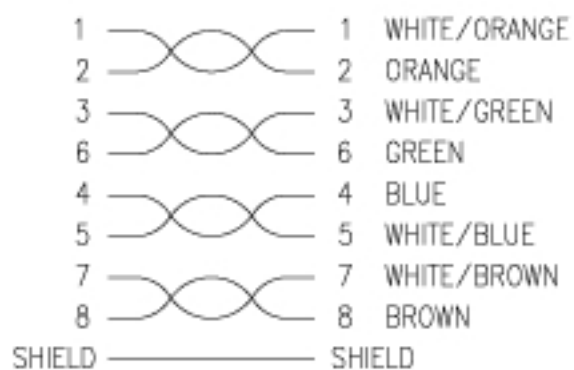

* NOTE: All relevant materials are complied with RoHS directive .

5	MOLDED PVC GREY		M304
4	MOLDED PE COLOR TRANSPARENT		M280
	MOLDED PVC GREY		M304
3	4 TWISD PAIRS CAT.5E 24AWG SSTP, OD 6.2mm, JACKET GREY, DRAWING No.EUAB2404P-259	Lmm	M304
2	8P8C MODULAR SHIELDED PLUG, GOLD PLATING 50u" ON CONTACTS	1	M205
1	8P8C JACK WITH SHIELDED, GOLD PLATING 50u" ON CONTACTS, PCB TYPE	1	MB06
No.	DESCRIPTION	Q'TY	Supplier
APPROVED			Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm± ±40mm
CHECKED	HU		
DRAWING	LI		
DATE	16/APR/10	ITEM NO.	SFUTP5EMF
		UNIT:mm	

CHECKED