


⚠ ELECTRICAL TEST:

- 1.CONTACT RESISTANCE: 5 OHM
- 2.INSULATION RESISTANCE: 5M OHM
- 3.VOLTAGE RATING: 300V

⚠ CABLE MARKING:

350MHz (UL) E305668 TYPE CM 26AWG 75°C CSA
 204790 CM 75°C ETL VERIFIED TIA/EIA-568-C.2 SSTP
 CAT.5E SHIELDED RoHS COMPLIANCE BATCH NO.

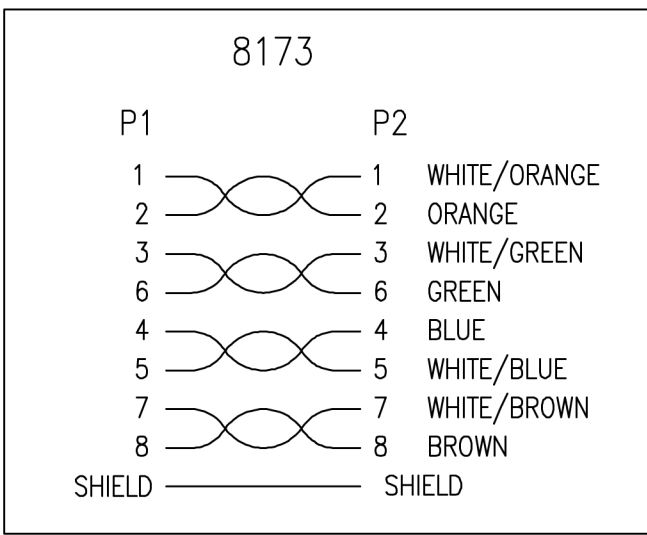

⚠ NOTE: All relevant materials are complied with RoHS directive .

3	MOLDED PVC GREY-WHITE	H1BP01-0304G07		M304
2	4 TWISD PAIRS CAT.5E 26AWG SSTP, OD6.2mm, JACKET GREY-WHITE DRAWING No. EUAB2604P-253	H5AB05-0304G07	L+15mm	M304 ⚠
1	8P8C MODULAR SHIELDED PLUG, GOLD PLATING 50u" ON CONTACTS, SHORT TYPE	A1NB17-0209	2	M209
No.	DESCRIPTION		Q'TY	Supplier
APPROVED		SFUTP5EULGR-X		Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm
CHECKED	HU			
DRAWING	XIAO			
DATE	13/SEP/18	ITEM NO.	8173	
			UNIT:mm	

⚠ REV.2 2018.05.21 ADD CABLE MARKING

⚠ REV.3 2018.09.13 ADD TEST

⚠ REV.1 2012.02.27 MODIFY CABLE SUPPLIER AND RoHS

CHECKED