

NOTE:

1. Electrical test:


- (1) 100% open short & miss wire test
- (2) Insulation resistance: DC 300V 10M OHM MIN
- (3) Contactor resistance: 3 OHM MAX

2. ROHS2.0 AND REACH COMPLIANT (CE)

3. PRINTING: CAT. 6 S/FTP 4×2×AWG27/7 PIMF ISO/IEC

11801 & EN50173 TIA/EIA 568 B.2-1 HALOGEN FREE ***GIGABIT***

- 4. PACKING: 0-5m (include 5m) 1PCS/PE BAG+LABEL1, 10PCS/PE BAG+LABEL2;
 5-10m (include 10m) 1PCS/PE BAG+LABEL1, 5PCS/PEBAG+LABEL2;
 Above 10m 1PCS/PE BAG+LABEL1

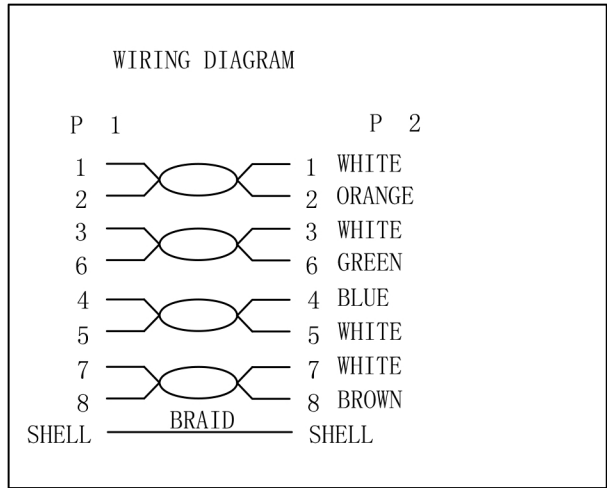

MATERIAL LIST:

⑥	LABEL	NO DRY GLUE LABEL	1	
⑤	MINI TIE	PE MINI TIE (POSSESS METAL)	2	
④	POLYETHYLENE BAG	PE BAG, HAVE A ORIFICE	1	
③	OVER MOLD	PVC 75A	2	
②	CONNECTOR	RJ45 8P8C SHIELDED, PIN GOLD PLATED 3U", SHELL PLATED NICKEL TRANSPARENT RED	2	
①	CABLE	S/FTP CAT. 6 27AWG (7/0.135BC*1P+AL-FOIL)*4PAIRS+ +B(0.12/5/16)AL-MG CABLE JACKET: LSOH OD=6.2±0.2MM	1	

UNO ELECTRONIC LIMITED (HK)

NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT' Y	REMARK	CUSTOMER	ITEM NO.	715XXX
		CHANGE PACKING	2014-02-12	A1	PRODUCT NAME	CAT. 6 S/FTP PATCH CORD	UNO ITEM NO.
		NEW	2013-09-04	A	DRAWNBY	CHECKBY	APPOBY
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.	FERGUS	ALVAN	DATE
							2013-09-04