


P1:	M-Y928A
	M-928A
P2:	M-113A

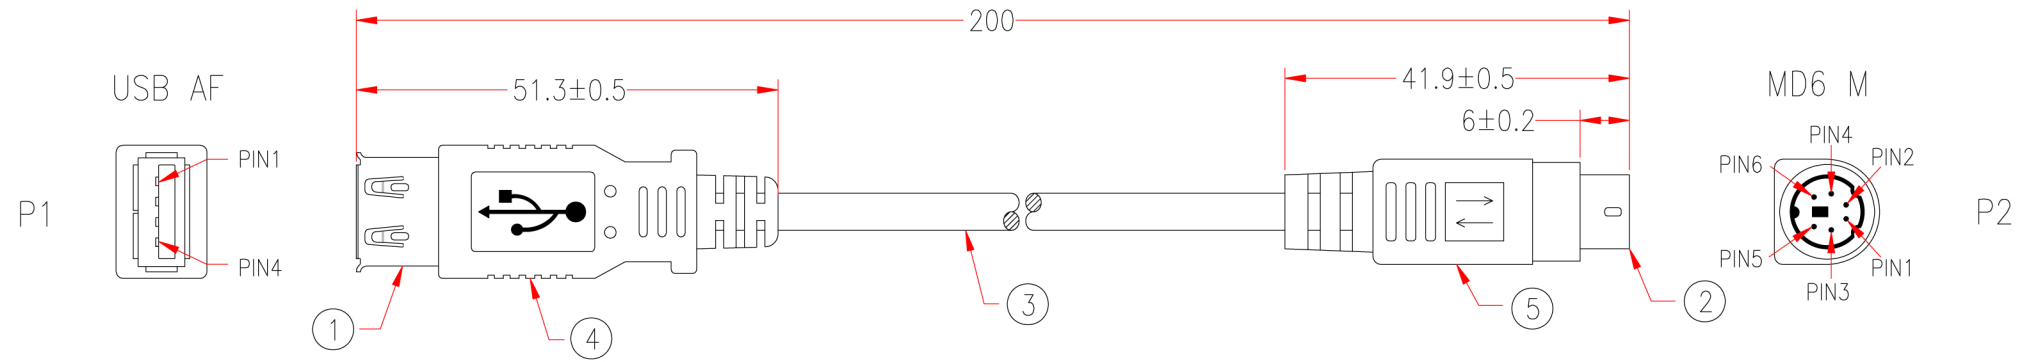

NOTE: All relevant materials are complied with RoHS directive .

9E74-1					
P1			P2		
1	—	4	RED	24#	
2	—	1	WHITE		
3	—	5	GREEN		
4	—	3	BLACK	24#	
SHIELD		SHIELD			

5	MOLDED PVC BLACK	H1BF01-0304K09		M304	
4	BLACK HEAT SHIRK TUBE ϕ 1.0*10mm	A4HA23-0959	1	M959	
	MOLDED PE COLOR TRANSPARENT	A5BA02-7777		M7777	
	MOLDED PVC BLACK	H1BF01-0304K09		M304	
3	USB 2.0 CABLE, UL STYLE 1 TWISTED PAIR 28AWG AND 2C 24AWG, AMA BRAID OD 4.5mm, JACKET BLACK, DRAWING No.EUAB2801P2402C-139	H5KH29-0304K09	180mm	M304	
2	MINI DIN 6 MALE, GOLD FLASH ON CONTACTS, BLACK INSULATOR	A1EE16-0108K09	1set	M108	
1	USB A FEMALE, GOLD FLASH ON CONTACTS, WHITE INSULATOR	A1HC03-0432	1	M432	
No.	DESCRIPTION			Q'TY	Supplier

APPROVED		USBFPS2M-02	Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm		
CHECKED	HU				
DRAWING	XIAO				
DATE	23/OCT/17	ITEM NO.	9E74-1	UNIT:mm	

CHECKED