


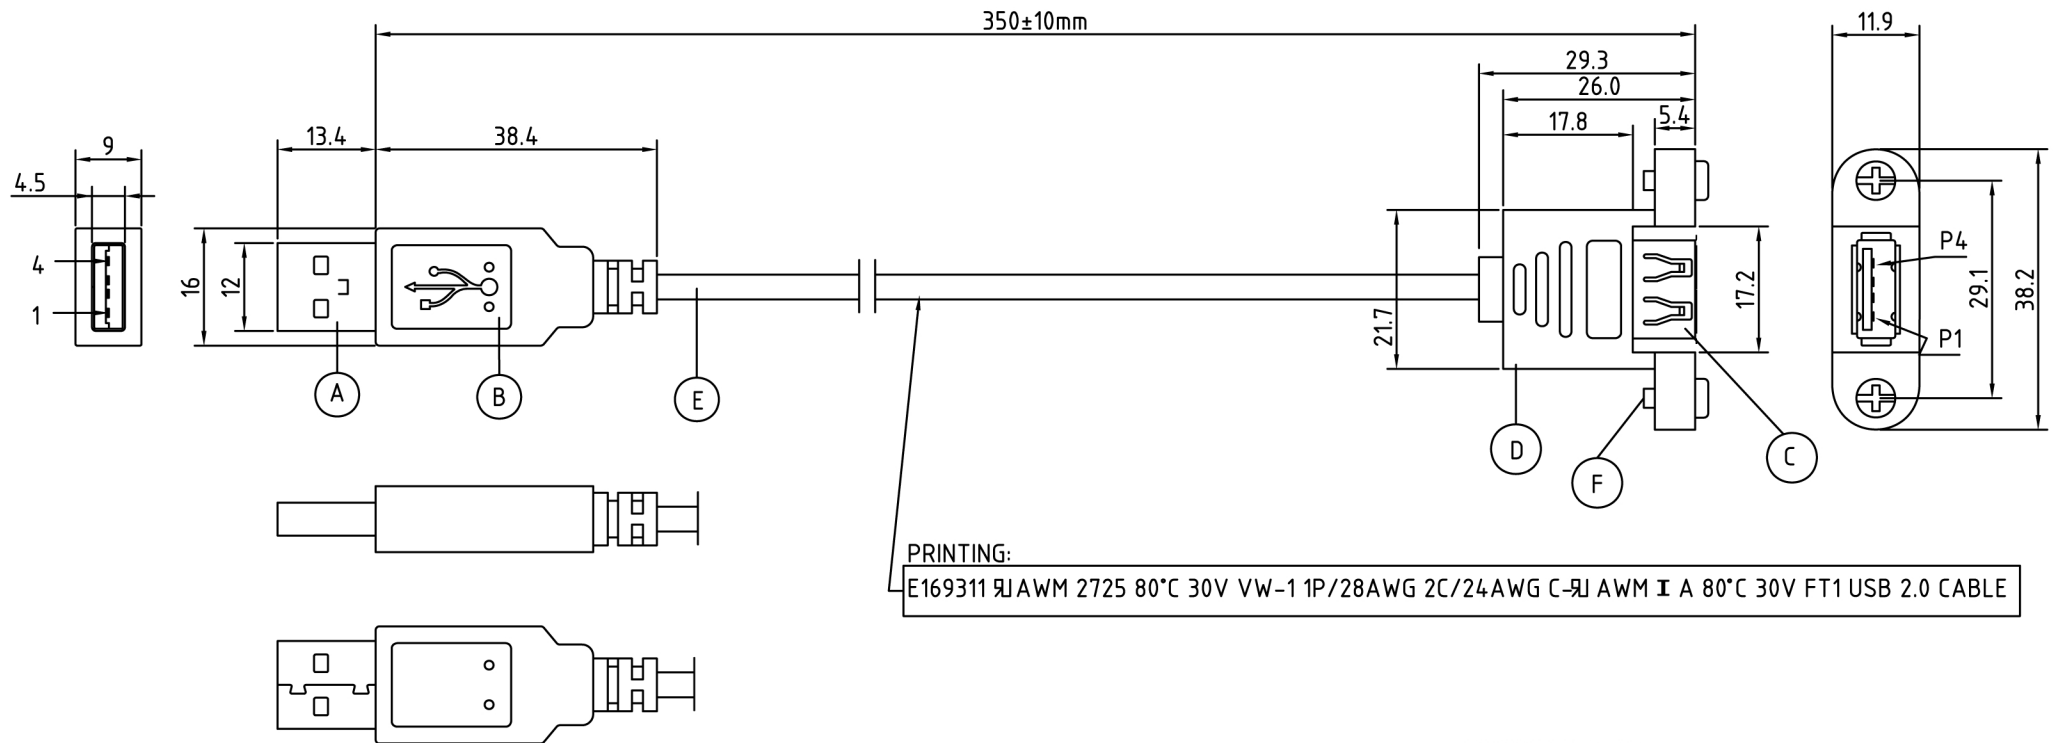

SPECIFICATION:

ITEM	PART NAME	MATEIAL	COLOR	QTY
A	USB MALE A-TYPE HOUSING	P.B	NICKEL	1
B	MODEL TY344 TYPE	PVC	BLACK	1
C	USB FEMALE A-TYPE HOUSING	P.B	NICKEL	1
D	MODEL TY428 TYPE	PVC	BLACK	1
E	UL2725 (2.0V)BK 1P×28# +2C×24#+1+B(65%)#4.5MM	PVC	BLACK	35CM
F	HN050X030TNOPOOA SCREW PS055X070TNOPO+A NUT	MILD STEEL	NICKEL	2SET.

NOTE: ALL MATERIALS ARE COMPLIANT TO "RoHS".

WIRING DIAGRAM

USB A-TYPE MALE

USB A-TYPE FEMALE

1 ————— 1 (RED) #24AWG
2 ————— 2 (WHITE) #28AWG
3 ————— 3 (GREEN) #28AWG
4 ————— 4 (BLACK) #24AWG

SHELL ————— SHELL

CUSTOMER:DIGGELMANN		
CUST. P/N:CA941-035		
S/O:	S/N:	PART No.: CC400-MF-35CM/BK
DRAWING No.		PART NAME: USB(A-TYPE) MALE TO USB (1-TYPE) FEMALE
DRAWN BY	Lingqi Meng	UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MM. TOLERANCE:DECIMAL .X ±0.1 .XX ±0.05 ANGLE ±1/2°
CHECKED BY	Zhongjiao He	
APPROVED BY	Chenhan	
		  SHEET 5 OF 6 SCALE NO